

VRLA Rechargeable Battery

BP90-12 (BP90-12FR)



FEATURES

- Maintenance free(no water topping-up required).
- No free acid(Non-spillable battery).
- Low self-discharge rate, lower than 3% capacity loss per month.
- Can be used in any orientation(excluding used inverted).
- Flame-arrestor is installed to ensure safety.
- Carry handles for easy installation.

APPLICATION

- UPS
- Telecom
- Golf-Carts



SPECIFICATIONS

Nominal Voltage	12 V
Nominal Capacity	90Ah @ 20 hour rate F.V.(1.75V/cell)
Approx. Weight	30.8Kg(67.90lbs.)
Terminals	B3 (Fitting M6 bolt & nut) I2 is optional
Internal Resistance	≤5mΩ (Fully Charged)
Max. Discharge Current	800 A (5 sec.)
Max. Charge Current	27 A
Operating Temperature Range	Charge : 0°C~40°C(32°F~104°F) Discharge : -20°C~50°C(-4°F~122°F) Storage. : -20°C~40°C(-4°F~104°F)
Container Material	ABS(UL94-HB, UL94-V0 is optional)



ISO 9001	
ISO14001	
UL	
CE	
<ul style="list-style-type: none"> ● IEC60896 ● JIS C 8704 ● GB/T 19638 	

DIMENSION(mm/inch)

OUTER DIMENSIONS

TERMINAL TYPE

- **Length**
329±2.0 (12.95±0.08)
- **Width**
172±2.0 (6.77±0.08)
- **Container Height**
215±2.0 (8.46±0.08)
- **Total Height**
B3:238±2.0 (9.37±0.08)
I2:220±2.0 (8.66±0.08)

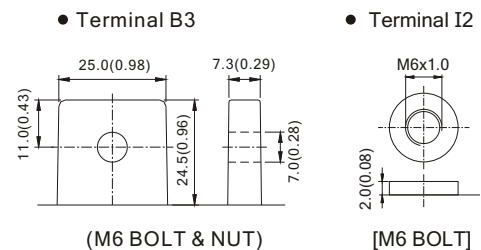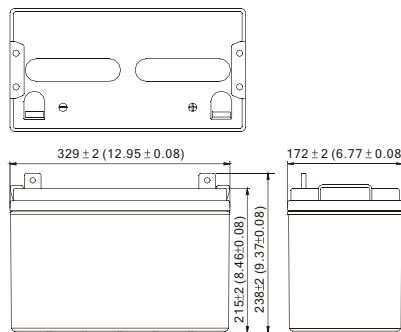

Terminal Hardware Initial Torque: B3,I2(5.5Nm±5%)

Constant power discharge characteristics at 25 °C/77 °F Unit: W

F.V. (V/cell) \ Discharge Time	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	2300	1877	1142	655.0	262.3	180.9	101.08	53.19
1.75V	2491	1963	1186	674.7	267.6	183.6	102.60	54.00
1.70V	2581	2024	1213	686.8	270.0	184.6	103.11	54.28
1.65V	2643	2071	1230	695.0	271.9	185.2	103.42	54.43
1.60V	2696	2112	1242	702.0	273.5	185.8	103.42	54.43

Constant current discharge characteristics at 25 °C/77 °F Unit: A

F.V. (V/cell) \ Discharge Time	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	205.3	166.1	96.8	55.04	21.86	15.07	8.42	4.43
1.75V	222.4	173.7	100.5	56.70	22.30	15.30	8.55	4.50
1.70V	230.4	179.1	102.8	57.71	22.50	15.38	8.59	4.52
1.65V	240.3	183.2	104.2	58.41	22.66	15.44	8.62	4.54
1.60V	249.6	186.9	105.3	58.99	22.79	15.48	8.62	4.54

All data shall be changed without prior notice, BB reserves the right to explain and update the information contained herein.